

9050 and 9100 Fail-Secure Manual Release Kit

DoorKing Part Number


2600-862

Converts **Fail-Safe** manual release models 9050 and 9100 slide gate operators to a **Fail-Secure** manual release. Power outages or turning power off **WILL NOT** allow gate to be manually operated without physically unlocking the slide gate operator with the key first. The slide gate operator "Fails" (Loss of AC power) in a "Secure" (Manually in-operable) condition. This option is **typically used** in UL 325 Class III and Class IV applications.


Kit Includes: Lock with 2 keys, release bracket with screw, washer and locknut.

Installation

DIP-Switch Setting




4702-010



4602-010


SW 2

Switch 4 must be **ON**. Solenoid lock will automatically retract and allow clutch plate to rotate **ONLY** during normal gate cycling.

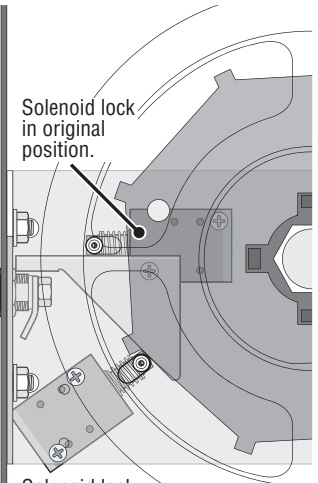

Solenoid lock in new position.


Operator Housing

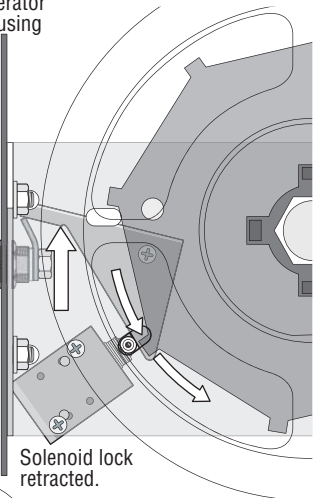

Solenoid lock retracted.

Key Release

Turning key 1/2 turn raises release bracket to retract solenoid lock. This allows clutch plate to rotate for manual operation **with or without** AC power.

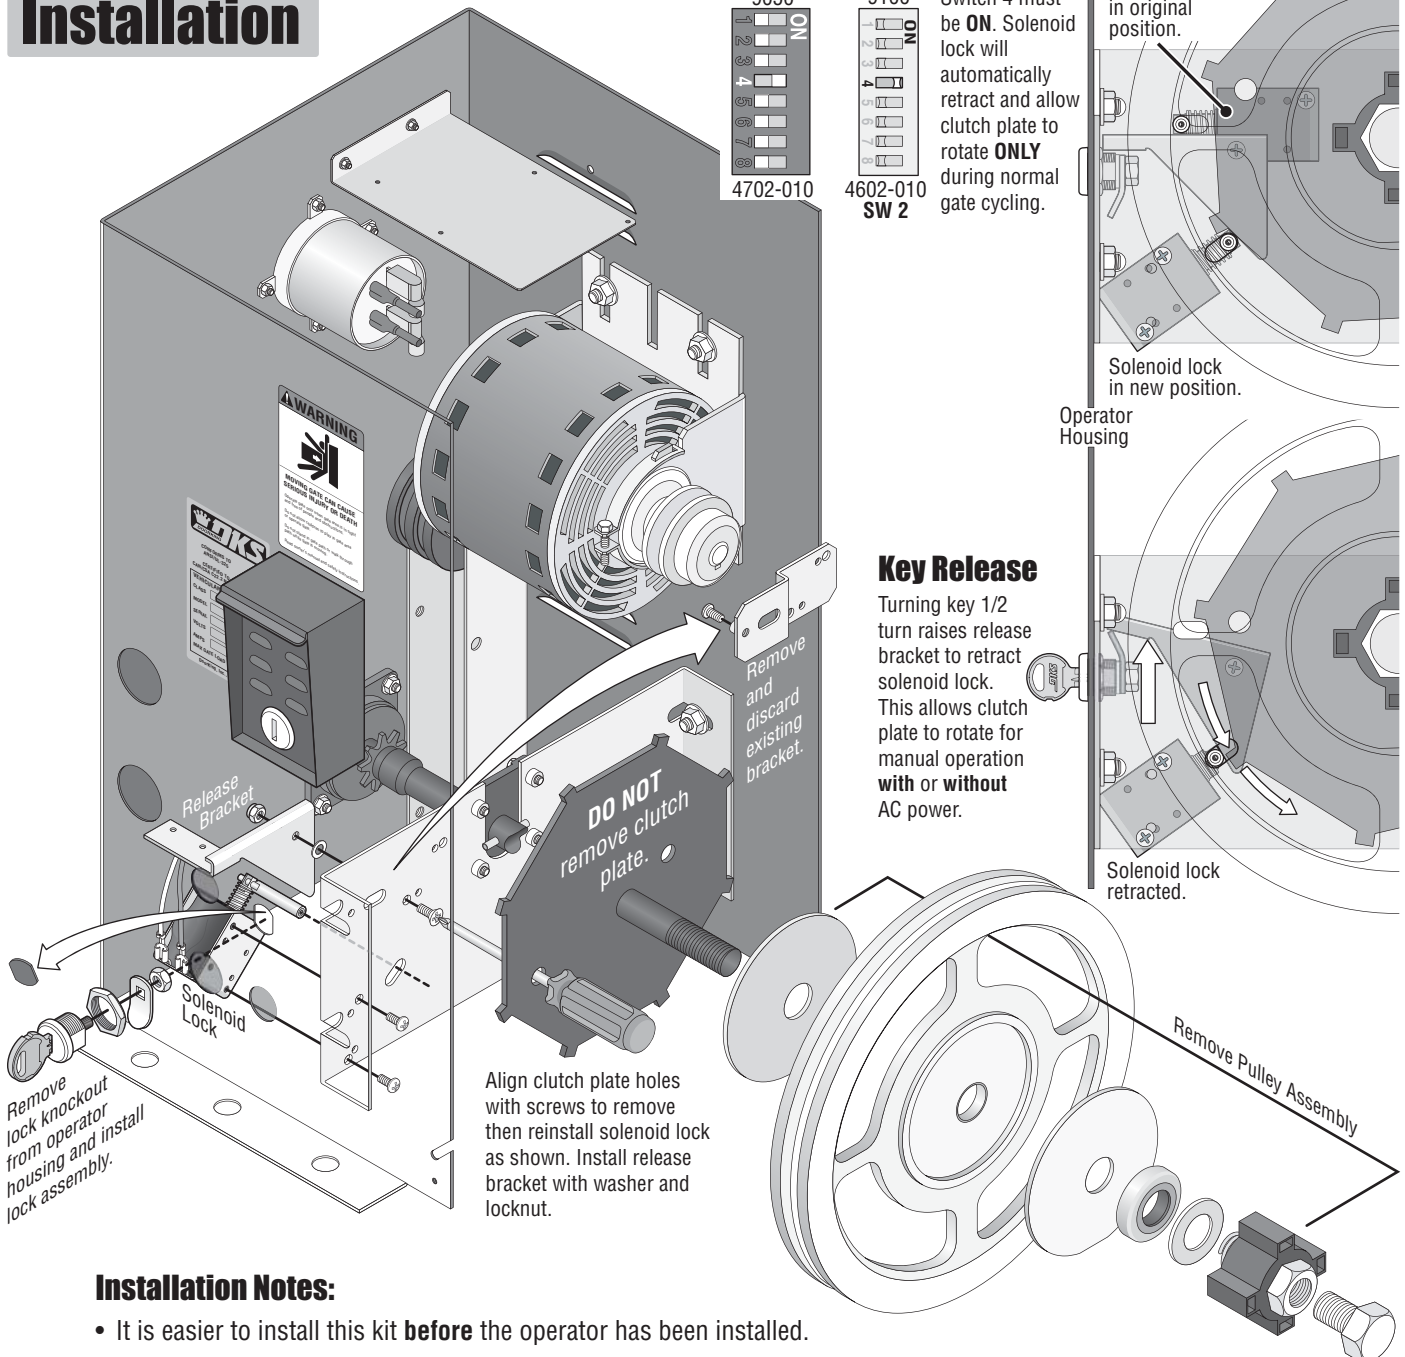

Installation Notes:

- It is easier to install this kit **before** the operator has been installed.
- Make sure that power to the operator is **OFF** if operator is already operational.
- When reinstalling solenoid lock, existing mounting holes may need to be elongated to allow retracted lock to clear clutch plate stops.

DKS
DOOR KING, INC.
120 Glasgow Avenue
Inglewood, California 90301 U.S.A.