


# IXG-DM7-HIDA

## IP Video Entrance Station

The IXG-DM7-HIDA is an IP video entrance station for the IX|IXG Series multi-tenant system. It is equipped with a 7" LCD directory screen that can be used to call a tenant or enter an access code.

Up to 9,999 names/numbers can be stored in the station. A motion sensor will activate the screen when the visitor approaches. Once a call is placed, the visitor will be displayed on the tenant station or app using the 720p HD camera.

The station is equipped with an HID® card reader for card access. It supports Prox or iCLASS® 26 bit cards. Up to 10 entrance stations can be assigned per unit and multiple units can be supported by one system.

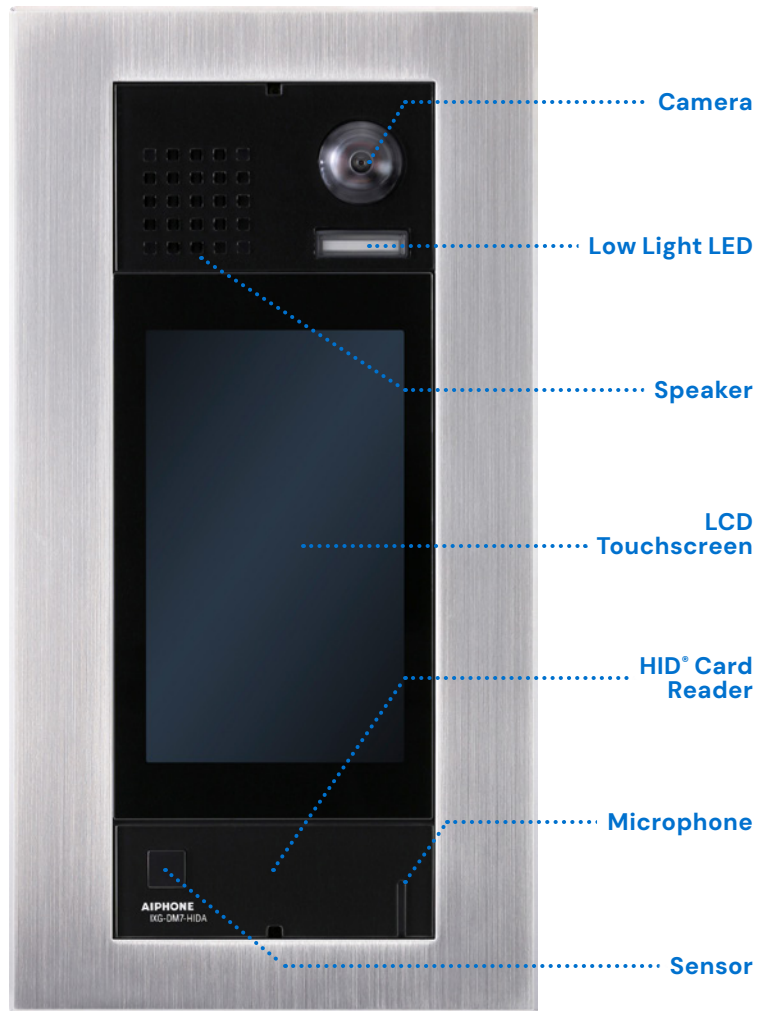

- **7" touchscreen**
- **PoE compliant**
- **On-board recording with microSD™ card**
- **Simple user interface**
- **Hands-free communication**
- **720p HD camera**
- **Up to 9,999 names/numbers can be stored**
- **Programmable contact inputs and outputs**
- **T-coil hearing aid compatibility**
- **Motion sensor to activate LCD**
- **Built-in HID® reader for card access, supports 26-bit Wiegand formats only**
- **Stainless steel panel**
- **Rugged IP65 and IK08 ratings**

<b>Power Source</b>	PoE (IEEE 802.3af Class O)	<b>HID® Reader</b>	High Frequency (13.56MHz): iCLASS, SEOS, iCLASS SR, iCLASS SE, MIFARE Classic, MIFARE DES Fire EV1
<b>Power Draw</b>	4.2W standby, 12.7W max		Low Frequency (125kHz): HID® Proximity
<b>Video Display</b>	7" TFT LCD touchscreen (800x400 resolution)	<b>Material</b>	Stainless steel
<b>Communication</b>	Hands-free (full-duplex)	<b>Door Release</b>	Two programmable Form C dry contacts, 24V AC/DC
<b>Camera</b>	720p HD		Relay 1: 3A
<b>Audio Codec</b>	G.711 (μ-law, A-law)		Relay 2: 500mA
<b>Video Codec</b>	H.264	<b>Mounting</b>	Flush mount with IXG-DM7-BOX or surface mount with SBX-IXGDM7
<b>Protocols</b>	IPv4/v6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP/RTCP, IGMP, MLD, SMTP, SFTP, DHCP, NTP, DNS, TLS	<b>Protection</b>	IP65, IK08
<b>Operating Temp</b>	-22° ~140°F (-30° ~60°C)	<b>Dimensions</b>	13 11/16 in H    7 3/16 in W 347.7 mm H    182.6 mm W