



Specifications:

- 24VDC operation.
- Current draws: 40mA.
- 5A/220VAC or 28VDC DPDT contacts.
- DIN Rail mountable (order part # CLIP4).


Dimensions (L x W x H): 2.75" x 2" x 1" (69.9mm x 50.8mm x 25.4mm)




Dry Contacts




Polarity Reversal

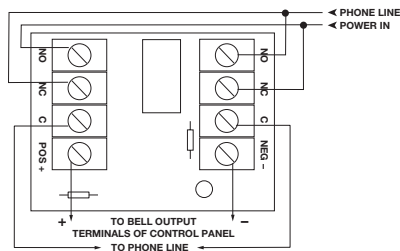

Latching Dry Contacts

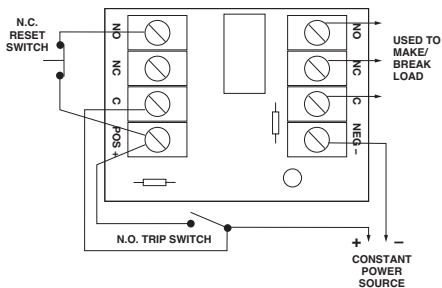

Line Seizure

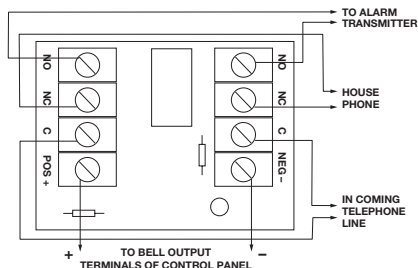

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.